



# Ceramic **Z-GLOSS**®

The **Ultimate** Nano Ceramic Protection



## ABOUT CERAMIC Z-GLOSS

Ceramic Z-Gloss utilizes Ziebart's more than fifty years of experience in developing and producing automotive protective coatings to provide unmatched protection for your vehicle.

Providing a strong but flexible nano-ceramic protective layer with enhanced gloss characteristics Ceramic Z-Gloss locks in the shine for up to three years – all backed by our unrivalled Ziebart warranty – extendable for the lifetime of the vehicle.

Ziebart's Ceramic Z-Gloss uses hydrophobicity to provide protection against road dirt, bugs, acid rain, bird droppings and other unavoidable contaminants that would otherwise damage your vehicles paintwork and appearance.

## WARRANTY

A protective coating is only as good as the warranty being provided and a warranty is only as good as the company standing behind it. For over 55 years Ziebart has warranted and protected more than 15,000,000 vehicles around the world.

With Ziebart you get the ultimate protective coating applied by certified technicians and backed by the most respected warranty in the automotive aftermarket.

## PRODUCT FEATURES



Hydrophobic  
Effect



High  
Temperature  
Resistance



Impact  
Resistance



U/V  
Oxidation  
Resistance



High  
Gloss  
Finish



Acid Rain  
Resistance



Extremely  
Durable



Adverse  
Weather  
Protection



Chemically  
Resistant



**Ziebart  
Warranty**



Dealer Name:

Bathala Marketing Industries, Inc.



Dealer  
Address:

2226 Chino Roces Avenue Cor.  
Don Bosco St. Makati City,  
Philippines



Dealer Phone  
Number:

63.2.818.7777




Website:

[www.carsavers.com](http://www.carsavers.com)

# HOW IT WORKS

## 3 LAYER NANO CERAMIC PROTECTION

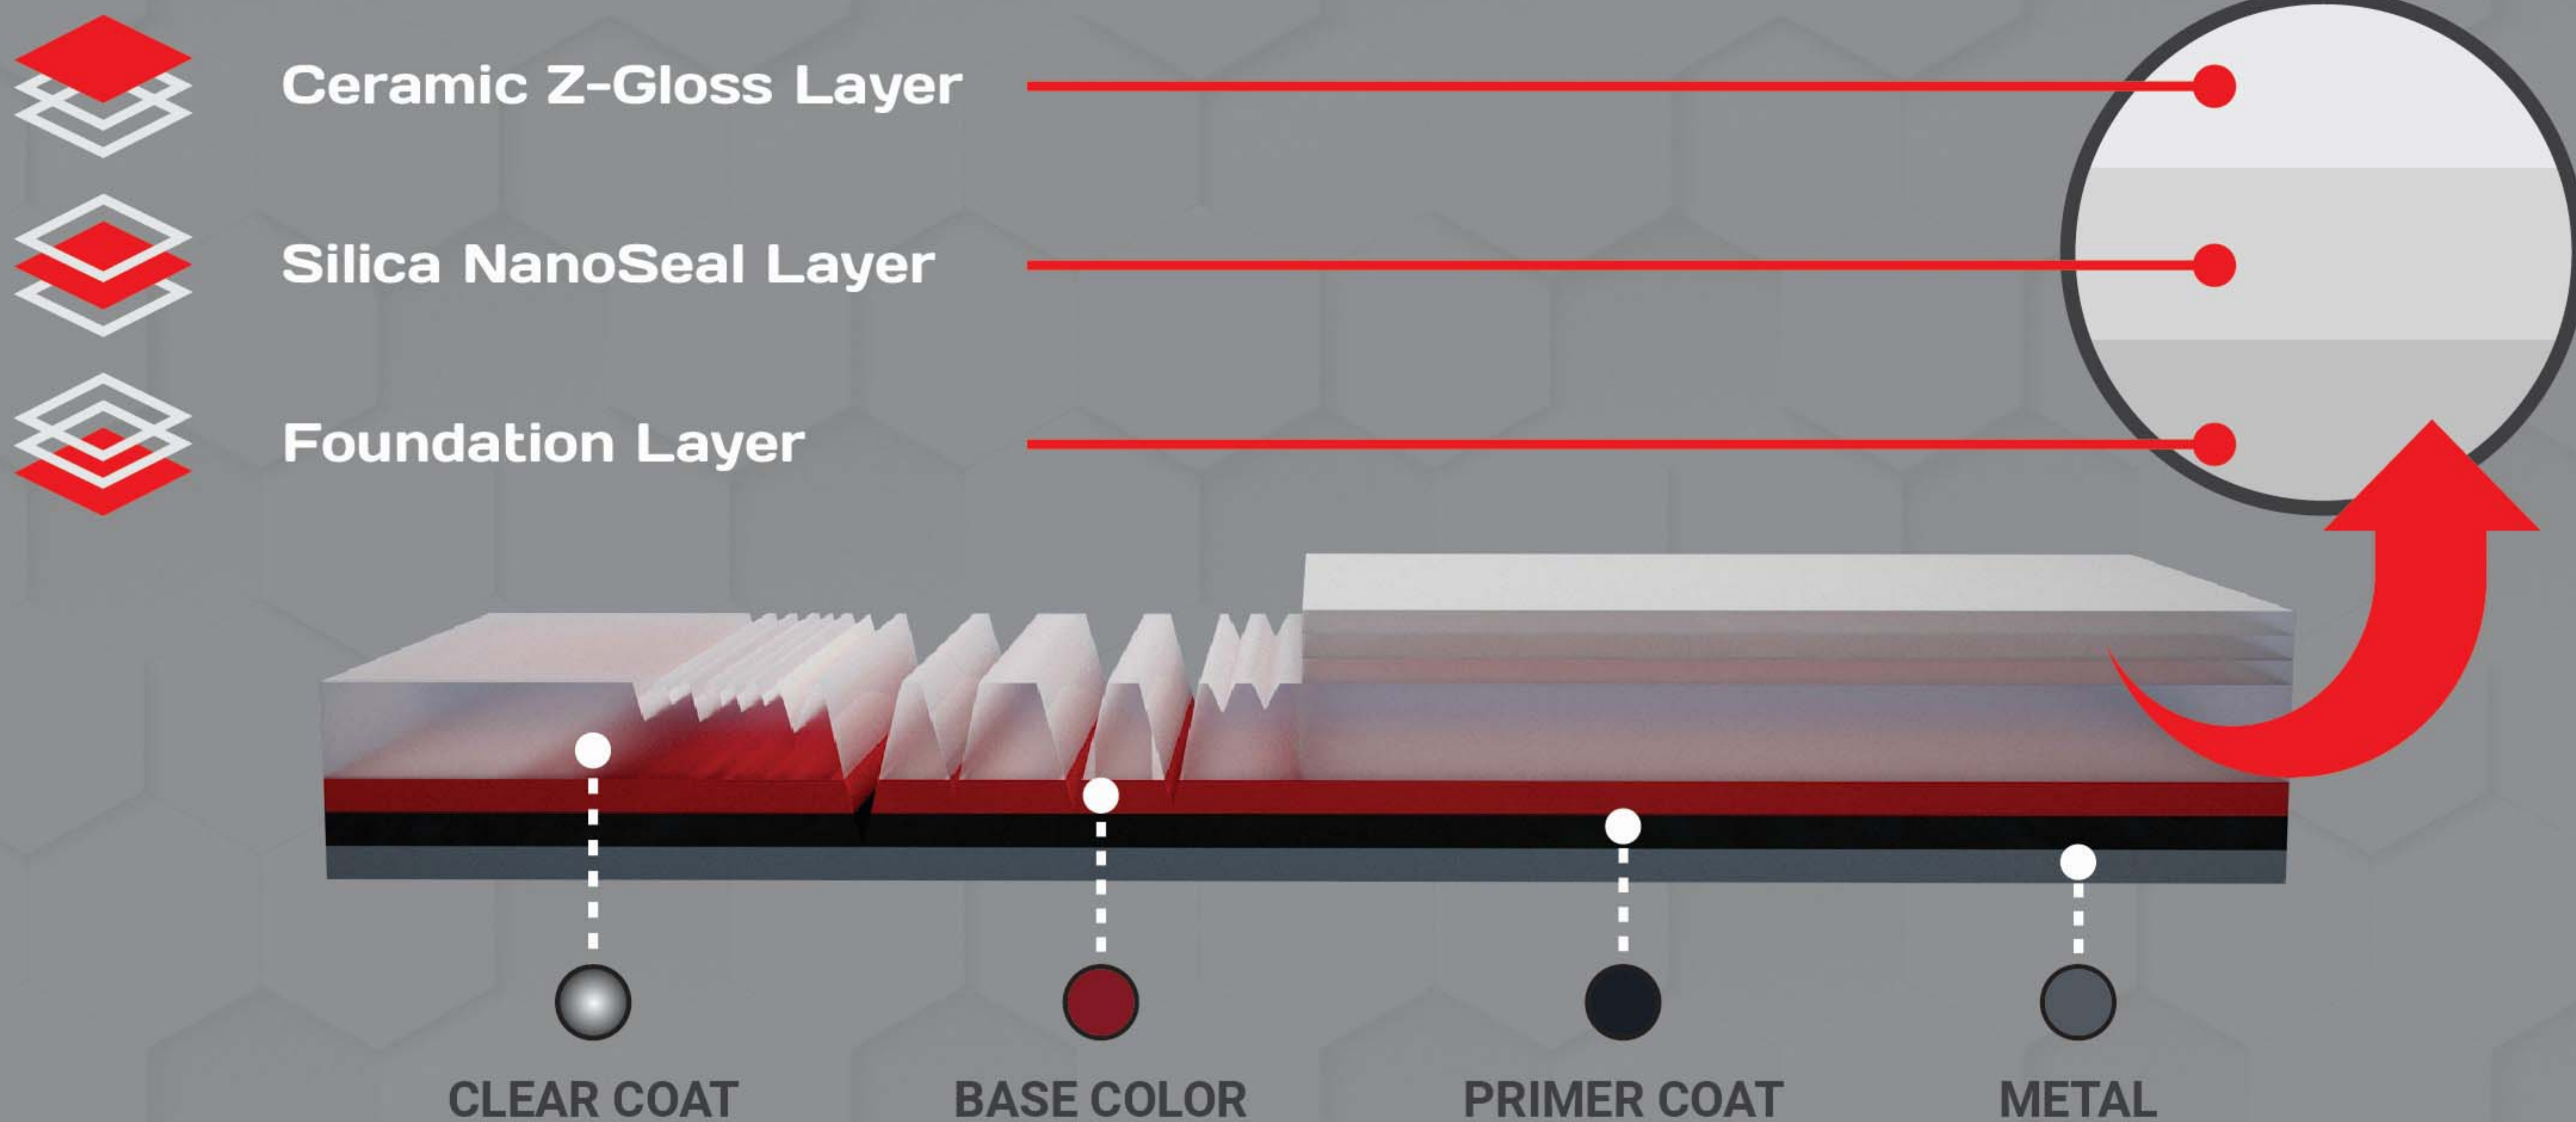

	Ceramic Z-Gloss	Diamond Gloss	Protect-a Shine
Durability	★★★★★	★★★	★★
Gloss	★★★★★	★★★★	★★★
Impact Resistance	★★★★★	★★★	★
Hydrophobicity	★★★★★	★★★	★
Chemical Composition	★★★★★	★★★★	★★

### Technical Information

Z-Gloss Thickness	1-2μ (per layer)	Hardness/Flexibility	6/2.7
Heat Range	180°C / 356°F	Durability (between applications)	2 Years
Gravity	.85	Density	7.1 lbs/gallon

### Warranty

- Two year warranty
- Extendable lifetime warranty
- International warranty

